


DILLON®

Quick-Check Blue: TowerPro

No whiteboards!

No changing sheaves!

No manual site form completion!

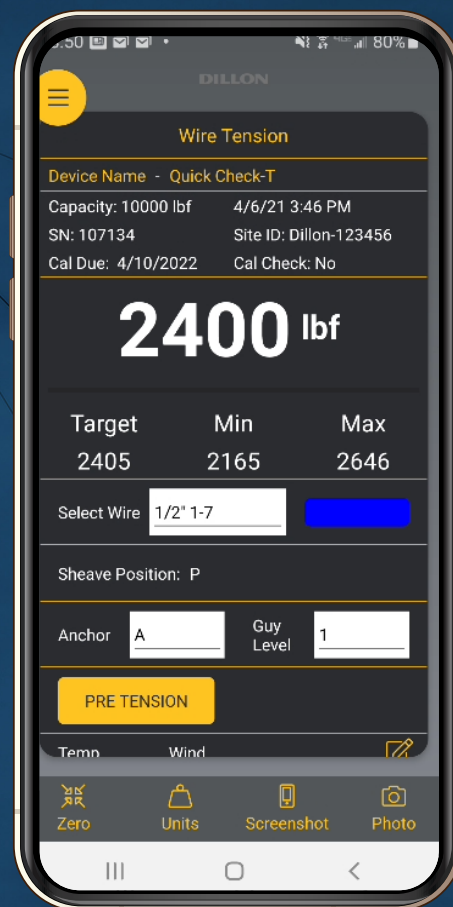

What's New?

- ▶ Bluetooth® enabled
- ▶ Custom mobile app
- ▶ Multi-wire single sheave
- ▶ Calibration check rod
- ▶ Automatic report generation with photos
- ▶ Automatic target tension calculations
- ▶ Ability to capture pre and post tension readings
- ▶ Inbuilt image capture

Why The Dillon Quick-Check Makes the Difference


- ▶ Reduces time on site
 - › No changing sheaves!
 - One sheave, two positions - just rotate
 - › No charts to figure out target tensions!
 - › No need for whiteboards!*
 - All info is on the display and on the app
- ▶ Reduces time off site
 - › Automatic site form completion with images
 - › Send completed reports directly from the app

**Tower owners discretion. Ask them why they need it!*




NEW Carrying Case


- ▶ IP67 waterproof
- ▶ Load bearing up to 140 lbs
- ▶ Cold resistant -40° F
- ▶ 50,000 uses catch lifespan
- ▶ Pressure balance valve

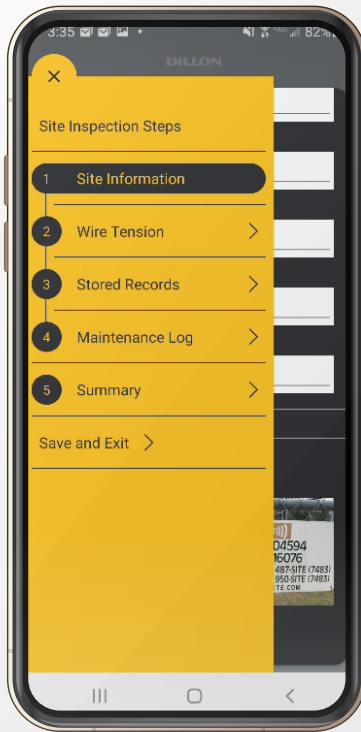

MENU INFORMATION:
Choose site inspection step

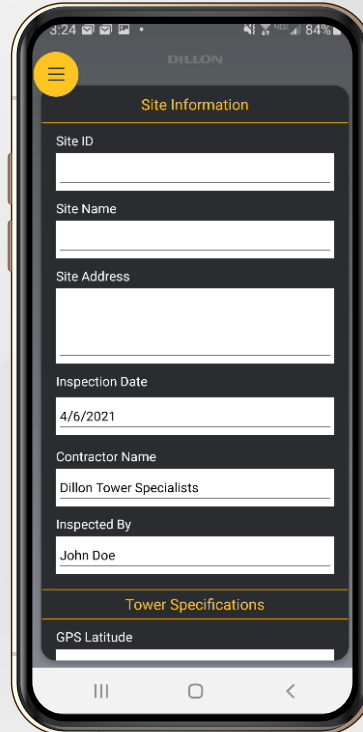

SITE INFORMATION:
Choose historic data or create a new site

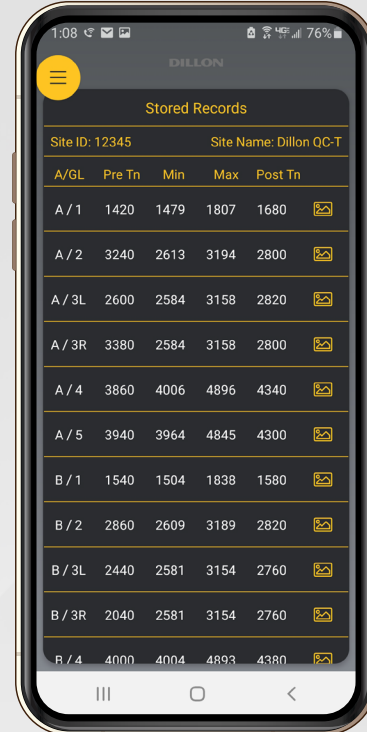

STORE RECORDS:
All readings easily viewed

SPECIFICATIONS

Capacity: 10,000 lb/45 kN/4500 kg
Range: Wire sizes from 3/16" (4.75 mm) up to 1.0" (25.4 mm)
Communications: Bluetooth®
Wire Calibrations: Up to 20 wire calibrations
Units of Measure: lbf, kgf, newtons
Capture Rate: 10Hz, 100Hz and 1000Hz
Resolution: Low / Medium / High (5000 resolutions)
Accuracy: + 3% instrument capacity
Data Export: Via mobile app
Battery: Two C batteries
Operating Range: -4° F to 158° F (-20° C to 70° C)
Display: Dot-graphic LCD display supports full text

Calibration: Each wire rope calibration is traceable to the National Institute of Standards and Technology. Certificate included with curve readings. Passes only with three consecutive confirming runs, with all points in specification.
Protection: Hard polymer storage case included
Environmental: Suitable for continued outdoor use
Size: 10 x 23 x 3" (25 x 59 x 8 cm)
Weight: 11 lb (5 kg)
Shipping Weight: 27 lb (12 kg)
Shipping Dimensions: 28 x 16 x 8" (710 x 410 x 200 mm)
Recalibration: Every 12 months
Approved By: Majority of cell tower owners



DILLON USA
 1000 Armstrong Drive
 Fairmont, MN 56031
 Toll-Free: (800) 368-2031
 Phone: (507) 238-8796
 Fax: (507) 238-8258
www.dillonforce.com

DILLON UK
 Foundry Lane, Smethwick,
 West Midlands B66 2LP
 Phone: +44 (0) 845 246 6717
 Fax: +44 (0) 845 246 6718
 Email: sales@dillon-force.co.uk
www.dillon-force.co.uk

DILLON

Force Measurement Equipment

A division of Avery Weigh-Tronix, LLC

EDXtremeBlue_L_100237
 V1 AWT35-100237